

NEW

Sentinel French Door 160

Comes standard with CGI patented 3 point lock and stainless steel package. Available with self-mating sidelites. 4" frame depth allows for easy retrofit install. Slanted or square sill covers



Available Finishes:

- White & Bronze

Standard Glass Colors:

- Clear, Gray, Dark Gray (Turtle Code), Bronze, Solexia Green, Azuria Blue, White Interlayer, Mist (Pattern 62), Rain

Glass Types:

- 7/16" Laminated
- 1" Insulated Laminated

Glass Coatings:

- Energy efficient LoE options

Standard Hardware:

- Patented concealed 3 point lock
- Aluminum hinges


Standard Features:

- Extruded snap-on square glazing beads
- 4" deep frame
- Fastener covers
- Triple weatherstripping
- Outswing configuration
- Square or slanted sill cover


Optional Items:

- Brushed Satin, Tuscan Bronze or Polished Brass levers
- Free-Standing and Self-Mating Sidelites

Optional Muntins:



Low Profile



Semi-Contoured (exterior only)


Glass Types:



Laminated Glass



Insulated Laminated Glass

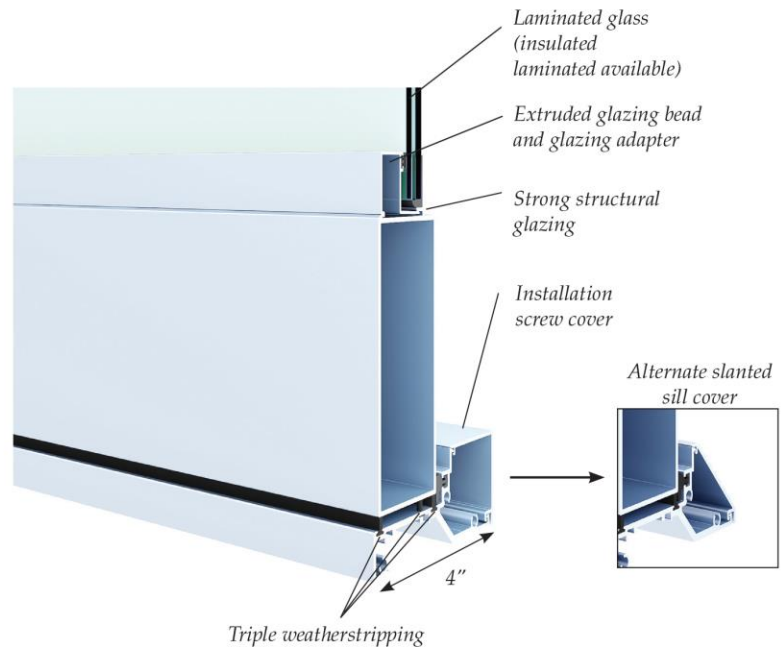

Sentinel French Door 160

Door Sizes (In inches)

Single

Code Size	6' 8"		Code Size	8' 0"	
	Width	Height		Width	Height
2668	31 1/4	80	2680	31 1/4	96
2868	33 1/4	80	2880	33 1/4	96
3068	37 1/4	80	3080	37 1/4	96

Double

Code Size	6' 8"		Code Size	8' 0"	
	Width	Height		Width	Height
4068	48	80	4080	48	96
5068	60	80	5080	60	96
5468	64	80	5480	64	96
6068	72	80	6080	72	96

Free-Standing or Self-Mating Sidelites (In inches)

Width	6' 8"		Width	8' 0"	
	Height	Height		Height	Height
12	80		12	96	
18	80		18	96	
24	80		24	96	
30	80		30	96	
33	80		33	96	
36	80		36	96	
37 1/8	80		*37 1/8	96	

* Free-Standing Sidelite only

Performance Results

Maximum Water Resistance		12 PSF
Large Missile	3' x 8' Panel (Ann/Ann Glass)	+80 PSF /-80 PSF
Forced Entry Test (AAMA 1302.5)		Passed

Energy Values

Laminated		Single Door/ Pair of Door			Self-Mating/ Free-Standing Sidelite		
		U Factor	SHGC	VT	U Factor	SHGC	VT
7/16"	Clear LoE 366	1.03	.24	.32	1.04	.28	.41
7/16"	Clear	1.03	.43	.47	1.03	.52	.59
7/16"	Gray	1.03	.34	.26	1.03	.41	.33
Insulated Laminated							
1"	Clear LoE 366	.69	.19	.33	.59	.22	.42
1"	Clear LoE 270	.69	.23	.36	.59	.27	.45